



THERMIC-WELDED TIGHT BELLOWS

They are used when watertight protection of the components (i.e. screws, shafts, etc.) is necessary against the contamination made by coolants.

- Economic bellows
- Good resistance to chemicals
- Resistance to heat compatible with the used materials (see characteristics on pages 52-53)
- They can be supplied in a variety of geometrical shapes, with low cost production of moulds (if not already present in our stock).
- **Materials available:**
 - Code TEMAT 018
 - Code TEMAT 019
 - Code TEMAT 153

See the characteristics shown in the tables on pages 52-53.






SEWN ROUND BELLOWS

These are used when strong rotation resistance is required (for instance, to cover ball screws) and where a very compact closed pack is required.

- Highly **reliable** bellows
- High resistance to mechanical and dynamic **stress**
- Resistance to **coolants and oils**
- Suitable for **high temperatures**
- Available with guide **bushings** and reinforcement **rings**
- No tooling **costs**
- With selected **edging** (in safety colors upon request)
- Minimum internal diameter **starting at 20 mm**
- **Any size** external diameter
- Good **price/quality** ratio

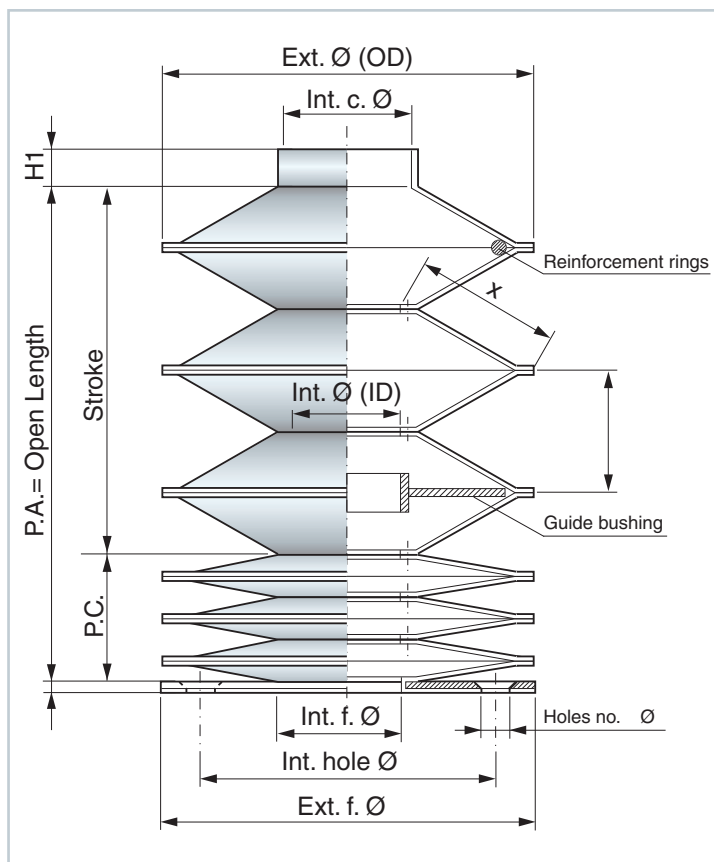

Materials available:

- Polyester coated with Neoprene* and Hypalon*
- Polyester coated with Nitril rubber
- Polyester coated with Polyurethane
- Polyester coated with PVC
- Kevlar* coated with Neoprene* and Hypalon*
- Kevlar* coated with Polyurethane
- Fiberglass coated with Silicone and Neoprene*
- Fiberglass coated with PVC
- Aluminum-coated fabrics

* Neoprene, Hypalon and Kevlar are registered Dupont trademarks

(see materials list on pages 52-53)

Formula for calculating the CLOSED LENGTH

$$P.C. = \text{Closed Length} = NP \cdot SP^*$$

$$NP = \text{Number of folds} = \frac{P.A.}{AP} + 1$$

* SP = Thickness of 1 fold; see materials list on page 52-53

$$AP = \text{Opening of 1 fold} = \left(\frac{\varnothing \text{ e. soff.} - \varnothing \text{ i. soff.}}{2} - 6 \right) \cdot 1,2$$


Note: When steel rings are required inside the folds, the P.C. is calculated by our engineering department.



HEAT-FORMED BELLOWS

These are used when high mechanical strength and heat resistance are required.

- Excellent resistance to **mechanical stress**
- Also available cone-shaped
- Resistance to **coolants and oils**
- No tooling **costs**
- Available with guide **bushings** and **reinforcement rings** upon request
- Suitable for **high temperatures**

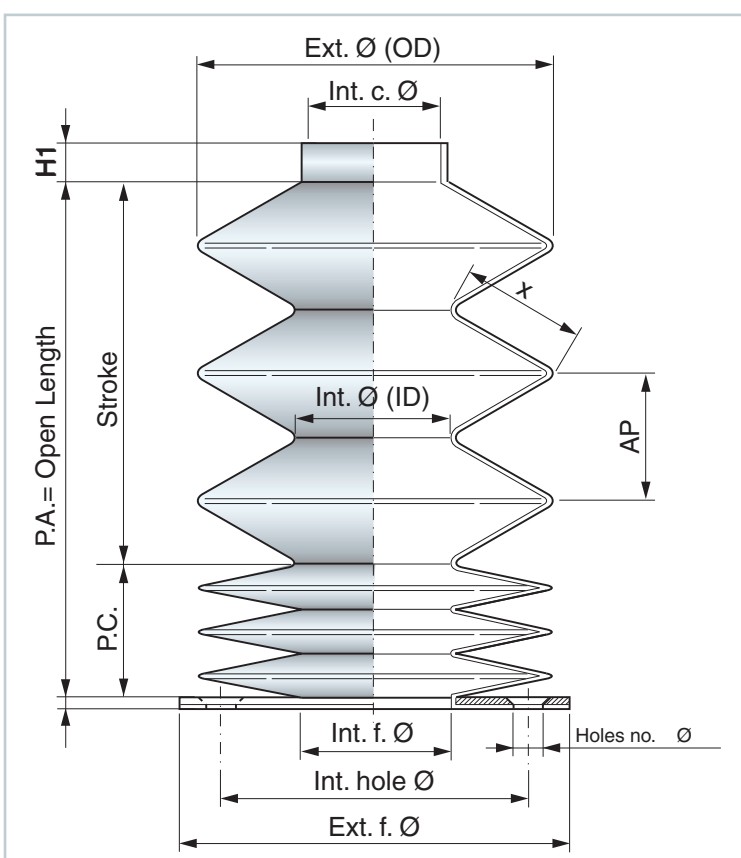


OPEN HEAT-FORMED BELLOWS

Materials available:

- Polyester coated with Neoprene* and Hypalon*
- Polyester coated with Nitril rubber
- Polyester coated with Polyurethane
- Polyester coated with PVC
- Fiberglass coated with Silicone and Neoprene*

* Neoprene and Hypalon are registered Dupont trademarks

(see materials list on pages 52-53)

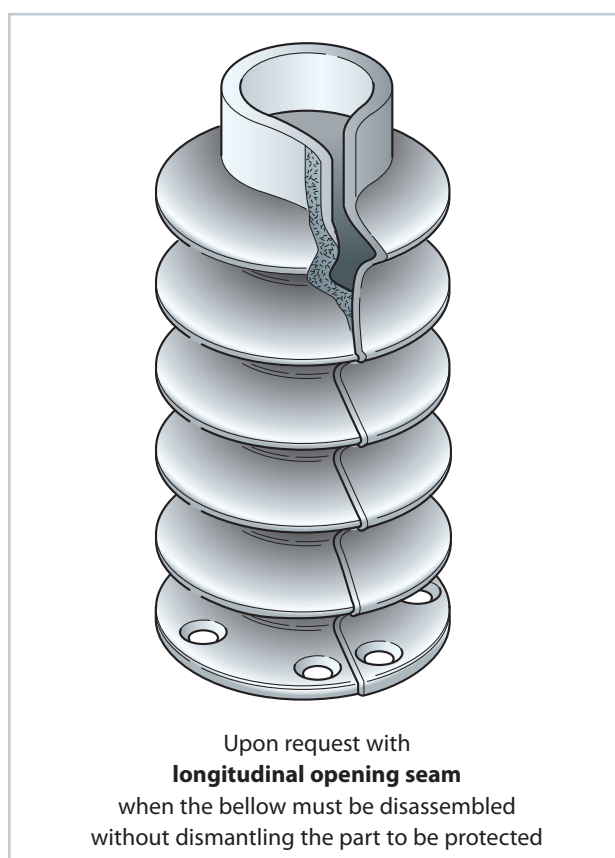

Formula for calculating the CLOSED LENGTH

$$P.C. = \text{Closed Length} = NP \cdot SP^*$$

$$NP = \text{Number of folds} = \frac{P.A.}{AP} + 1$$


* **SP** = Thickness of 1 fold; see materials list on pages 52-53

$$AP = \text{Opening of 1 fold} = \left(\frac{\varnothing \text{ e. soff.} - \varnothing \text{ i. soff.}}{2} \right) \cdot 1,41$$

Note: When steel rings are required inside the folds, the **P.C.** is calculated by our engineering department.






Questionnaire for Round Bellows

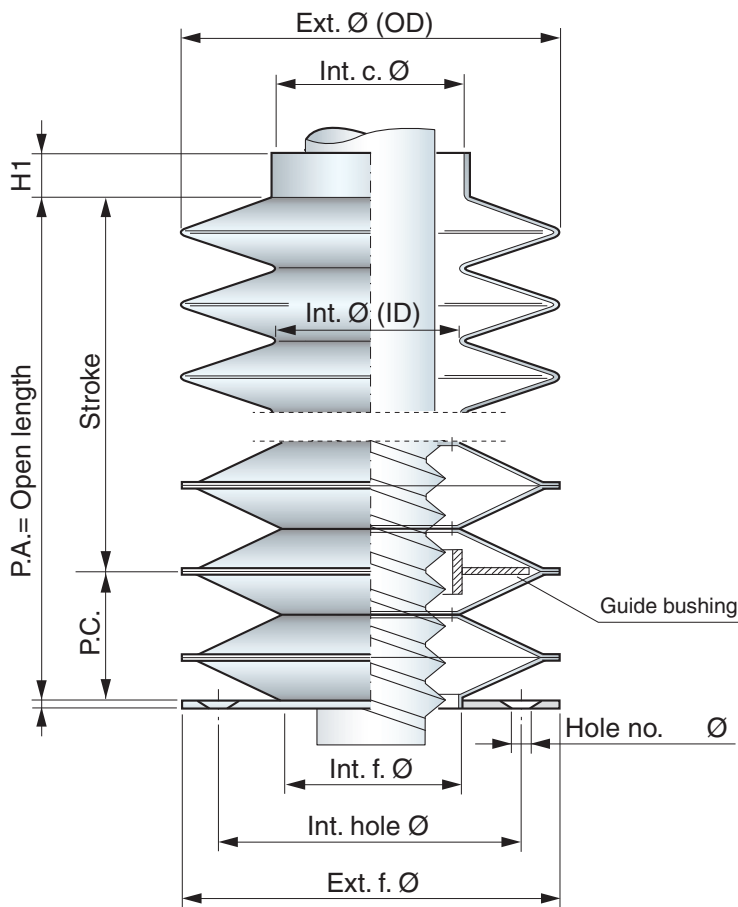

! Bellows type

- ☐ Sewn
- ☐ Heat-formed
- ☐ Thermic-welded

! Fastening system

- ☐ A 
- ☐ B 
- ☐ C 

! Type of machine on which the ROUND BELLOWS is to be installed:

- ☐ METAL working machine
- ☐ MARBLE working machine
- ☐ GOLD working machine
- ☐ PAPER working machine
- ☐ FABRIC working machine
- ☐ GLASS working machine
- ☐ FOOD processing machine
- ☐ PHARMACEUTICAL processing machine
- ☐ AGRICULTURAL processing machine
- ☐ TANNING machinery
- ☐ CLAY working machine
- ☐ WOOD working machine
- ☐ Other

! Type of material falling on the bellows:

.....

.....

.....

! Liquids to which the bellows will be exposed:

.....

.....

.....

! Working position:

- ☐ Horizontal ☐ Vertical

! Temperature of material falling on the bellows:

..... °C

! Part to be protected:

- ☐ Stem or shaft:
Diametermm
- ☐ Screw:
Diametermm
Pitchmm
- ☐ Ball screw:
Diametermm
Pitchmm
RPM in rapid travel.....
- ☐ With longitudinal seam
- ☐ Other.....
-
-
-

! Company name:

Contact person:

Phone: E-mail:

Quantity:

Annual demand:

Date:

Notes:

NOTE: The data fields and/or tables marked by ! are the least ones to be filled in order to give you a quotation.